

cylinder scale for liquefied gases **Model 900**


4

Description

The pressure of a liquefied gas remains constant as material is withdrawn as long as a liquid phase remains in the cylinder. When the liquid phase is exhausted the pressure drops very quickly and empties without warning. This phenomenon renders a cylinder pressure gauge virtually useless. The only way to monitor the contents of a cylinder containing a liquefied gas is by weight.

The Model 900 cylinder scale is designed to give a positive indication of the amount of product remaining in the cylinder. It allows the user to subtract the tare weight of the cylinder so that the net contents can be read directly. A color coded dial reads in pounds and kilograms. A nonskid ramp is available to make loading cylinders convenient and easy.

The scale is ruggedly constructed and features a stainless steel cover for durability.

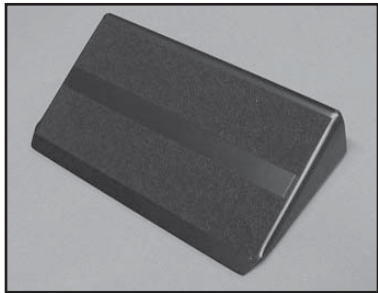

900-6 Scale Ramp

Applications	Features	Specifications
Recommended for use with all liquefied gases such as carbon dioxide, ammonia, nitrous oxide, fluorocarbons, hydrogen sulfide, sulfur dioxide, propane and heavier hydrocarbon gases.	<ul style="list-style-type: none"> • Heavy duty 16 gauge • Stainless steel cover • Dual dial scale - pounds and kilograms • Color-coded easy to read dial 	<ul style="list-style-type: none"> • <i>Tare weight range</i> 0-150 lbs. (0-68 kg.) • <i>Product weight range</i> 0-150 lbs. (0-68 kg.) • <i>Total capacity</i> 300 lbs (136 kg.) in 5 lb. (2 kg.) divisions • <i>Readability</i> 1 lb. (0.5 kg.) by estimation • <i>Dimensions</i> 10 3/4" x 10 1/4" x 2" high

Ordering Information	
Model	Description
900	Scale with non-skid ramp
900-5	Scale only
900-6	Ramp only

Electronic Cylinder Scales

Description

The pressure of a liquefied gas remains constant as material is withdrawn as long as a liquid phase remains in the cylinder. When the liquid phase is exhausted the pressure drops very quickly and the cylinder empties without warning. This phenomenon renders a cylinder pressure gauge virtually useless. A similar situation arises when using cryogenic containers of liquid nitrogen, oxygen, and argon. The only way to monitor the contents of a cylinder of liquefied gas or a cryogenic container is by weight.

The Series 620 and 320 electronic scales are designed to give a positive indication of the amount of product remaining in the cylinder as material is being withdrawn. These units allow the user to electronically subtract the tare weight of the cylinder so that only the net contents can be read directly. The built-in alarm can be set for any weight value from 0-100% of the scales capacity. The units provide a red LED visual alarm and an audible alarm with silence function. An integral solid state relay is provided for the activation of external alarms or other equipment when the alarm set point is reached.

The scales are ruggedly constructed using one or more load cells in a sturdy stainless steel and/or aluminum diamond plate platform with mechanical stops at 150% of capacity to prevent damage. The model 620G-300 with a capacity of 300 pounds has a 9.5" x 9.5" stainless steel platform that accommodates most compressed gas cylinders. For larger diameter cylinders, the 320D-500 is available with a capacity of 500 pounds has a 20" x 27" diamond plate steel platform.

The model 320M- 1000 has a 1000 pound capacity and accommodates cryogenic containers with its 20" x 27" aluminum diamond plate steel platform. A ramp is available for each model so that cylinders can easily be rolled on and of the scale platform without lifting.



320 Series



620G-300

Features

- Controller has large 1" high LCD digital display in water resistant housing
- Rugged load cell weighing technology with 300, 500, or 1000 pound capacity
- Weight resolution up to 0.1 pound
- Accuracy 0.1% of full scale
- Built-in visual alarm and audible alarm with silence function
- Built-in solid state relay
- 0-100% of full scale tare weight adjustment
- 0-100% of full scale alarm set point adjustment
- Both large and small platform sizes available
- Easy unit conversion from pounds to kilograms

Applications

Recommended for use with all liquefied and cryogenic containers in applications where running out of gas will cause a serious disruption in operations or a loss of product.

Ordering Information

Model	Total Capacity Pounds	Resolution pounds	Platform Dimensions
620G-300	300	0.1	9.25" w x 9.25" d x 1.5" h
320D-500	500	0.1	20" w x 27" d x 1-7/8" h
320M-1000	1000	0.2	20" w x 27" d x 1-7/8" h
620R	ramp for 620G		9" w x 5.5" d x 1.5" h
320R	ramp for 320D & 320M		20" w x 18" d x 1-7/8" h